



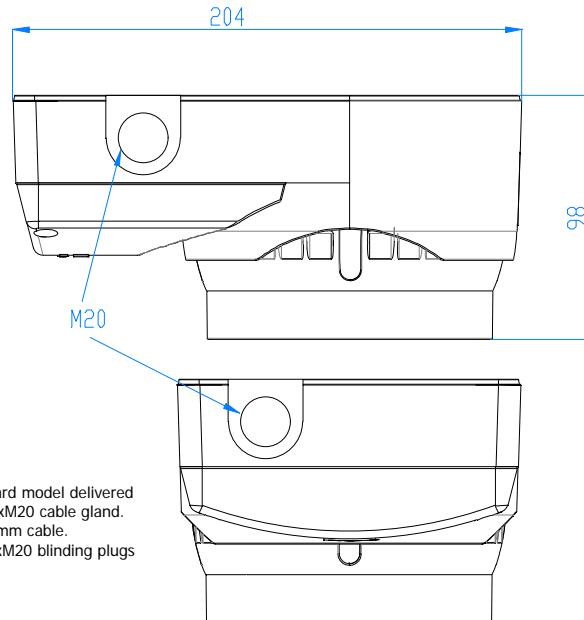


DNH

LP-210(T)

ISO 9001 CERTIFIED

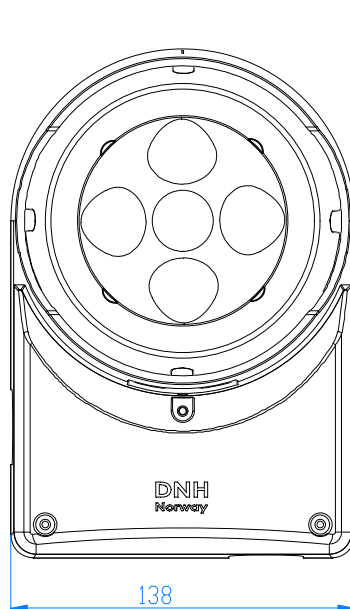


CIRCUIT DIAGRAM

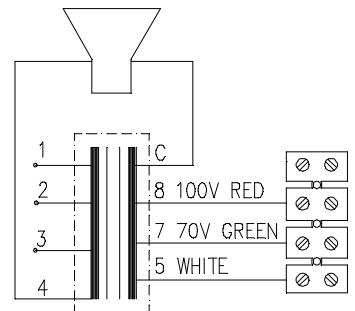

Secondary nominal tapings	
C : 4	10 W
C : 3	5 W
C : 2	2 W
C : 1	1 W

Sound pressure levels at 1W/1m w/P-5/15 PS

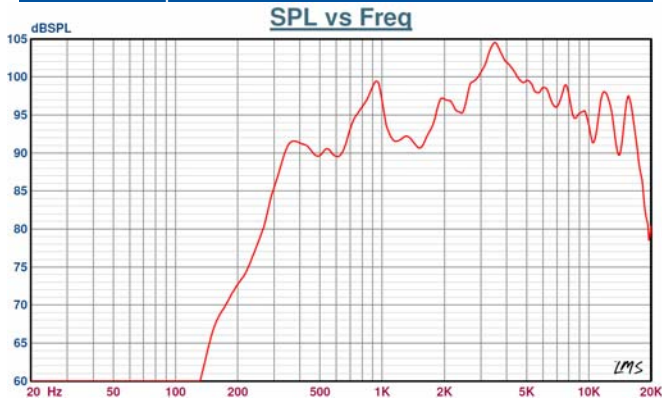

Specifications

Material / Color	Polyamide UL94 V0 / RAL 7035
Mounting	Screws and keyhole
Termination	Spring clamps
Weight w/transformer	1 Kg
IP-rating	56
Max. / min. amb. temp	90°C / -20°C
Rated / max. power	10 W / 10 W
SPL 1W/1m	101 dB
SPL rated power	111 dB
Effective freq. range	300 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	° / °
Directivity factor, Q	
Options	Impedances, colors, labels

Installation, Operation and Maintenance Procedures

- Remove the front lid by three screws.
- Screw the loudspeaker to wall or ceiling by three screws.
- Lead cable through cable gland, connect to terminal (70V or 100V) and select required tapping in to the transformer.
- To change the direction of the loudspeaker adjust the sound unit into the required direction.
- Screw the lid back into place by three screws.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open the loudspeaker when energized.
- This loudspeaker is supplied with a two years warranty against defective workmanship.

DNH reserves the right to alter specifications without notice





Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.