



Bibby Scientific

Focus on Slide Preparation



*One company, four internationally-recognised brands*



## Introduction

Bibby Scientific Ltd offer a range of products designed for use in the paraffin method of slide preparation in histology labs.

Electrothermal's® Paraffin Wax Dispenser heats wax to a liquid state providing convenient 'wax on tap' for histology laboratories.

The Stuart® Shaking Incubator is ideally suited to incubating samples during infiltration, maintaining the molten state of the wax to allow it's equilibration within the tissue.

The Paraffin Flotation Bath is designed specifically to aid in the manipulation of sectioned samples onto glass slides and flatten out crinkles produced after microtome slicing.

Our bestselling Slide Drying Bench is used for drying glass slides after sample mounting in preparation for clearing and staining.

**Resection**  
Extraction of tissue sample.

**Fixation**  
Preservation of cellular structure of tissue.

**Dehydration**  
Removal of water.

**Infiltration**  
Molten paraffin is left to equilibrate within tissue, at 58°C, to replace dehydration agent.

**Embedding**  
Solidification of tissue within a cube of paraffin.


**Sectioning**  
Fine slicing of solid tissue cube on a microtome, creating a ribbon of sections.

**Mounting**  
Remove crinkles and allow effortless manipulation onto slides.

**Clearing**  
Removal of paraffin from tissue.

**Staining**  
To improve visibility of cellular structures.

## Innovative products for histology and pathology laboratories

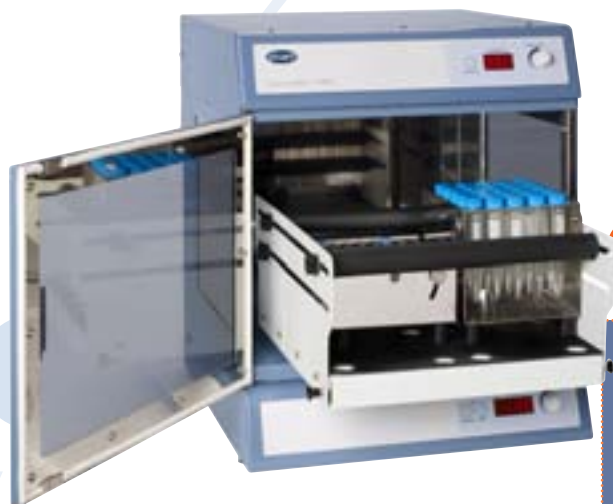

### Shaking incubator

Product code: **SI500**

Suited to optimising infiltration of wax into samples. Key features include:

- Combined incubator shaker
- Unique retractable platform for easy loading and unloading
- Digital display for temperature and speed
- Integrated timer

Ideal for  
**Infiltration** applications

Cooled  
and large  
capacity  
incubators  
available

#### Specification

Temperature range	Ambient +5°C to 60°C
Temperature display resolution	0.1°C
Temperature precision	±0.5°C
Temperature fluctuation	±0.5°C
Temperature variation	<0.5°C
Speed range	30 to 300 rpm
Orbit diameter	16mm
Platform size	335 x 335mm
Internal dimensions (w x d x h)	422 x 408 x 297mm
Maximum vessel height	250mm
Maximum load	10kg
Overall dimensions (w x d x h)	450 x 474 x 522mm
Net weight	30kg





**Ideal for Infiltration and Embedding applications**

## Paraffin Wax Dispenser

Product code: **MH8523B** (Please add X1 for 115V unit)

Enables routine tissue embedding to be easy and mess free.

Designed for use with paraffin wax with a melting range from 45°C to 65°C. Key features include:

- Heated tap to prevent wax solidification
- PTFE lining makes it virtually maintenance free and easy to clean
- Added safety feature which warns if the wax temperature is above the set temperature
- None drip nozzle on the tap

### Specification

Capacity	4.5L
Material	Powder-coated aluminium case
Temperature	Ambient +5°C to 75°C
Dimensions (h x dia)	300mm x 280mm
Weight	4.5kg

## Slide Drying Bench

Product code: **MH6616** (Please add X1 for 115V unit)

For the drying of mounted tissue samples.

Key features include:

- Black surface gives good visibility of samples
- Capacity for 50 slides which can be arranged in different orientations
- Set temperature up to 100°C
- Removable support bars to allow slides to lay flat

**Ideal for Mounting applications**

### Specification

Capacity	Up to 50 slides
Material	Base and top powder-coated aluminium
Max Element Temperature	100°C
Dimensions (d x w x h)	180 x 390 x 95mm
Weight	1.8kg

**Best seller**



## Paraffin Section Flotation Bath

Product code: **MH8517** (Please add X1 for 115V unit)

Allows quick, clean and crinkle free sample mounting after microtome sectioning. Key features include:

- Black PTFE interior gives high contrast for viewing specimens
- Temperature control as opposed to arbitrary power control
- Improved temperature accuracy
- Improved temperature stability of  $\pm 0.5^\circ\text{C}$
- Improved heat up rates - 45°C typically achieved within 40 minutes with 2.25L of water
- Overheating prevented with new temperature control mechanism

**Ideal for Mounting applications**

**NEW**

### Specification

Capacity	2.5L
Temperature	30°C to 70°C
Temperature Stability	$\pm 0.5^\circ\text{C}$
Bath material	Aluminium base with PTFE coated interior
Dimensions (d x w x h)	330 x 330 x 140 mm
Weight	2.7kg
Heater Power	240W





Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



**UK Office**

**Keison Products,**

**P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.**

**Tel: +44 (0)330 088 0560**

**Fax: +44 (0)1245 808399**

**Email: [sales@keison.co.uk](mailto:sales@keison.co.uk)**

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.