

FMC-10

Single Point Gas Alarm

The FMC-10 has been designed to operate in the full range of environments from commercial premises through to heavy industrial applications which may require hazardous area sensing.


A fixed single point alarm unit that meets the requirements for economic and reliable monitoring of gas levels in a wide range of environments from commercial premises through to heavy industrial applications which may require hazardous area sensing. Typical monitor locations are - public buildings, boiler plant rooms, swimming pools, water treatment works, H&V control systems, manufacturing and process plants.

Key Features

- Flammable, Oxygen or Toxic Gases
- Wall or panel mount
- Two alarm stages + relays
- Internal or remote sensor
- Compact size
- Low power consumption
- 4-20mA analogue output
- Sealed to IP65 rating
- Extensive fault detection circuitry
- Delay to alarm options

Applications

- Petrochemical industry
- Chemical industry
- Storage facilities
- Process plants
- LNP facilities
- Waste water treatment

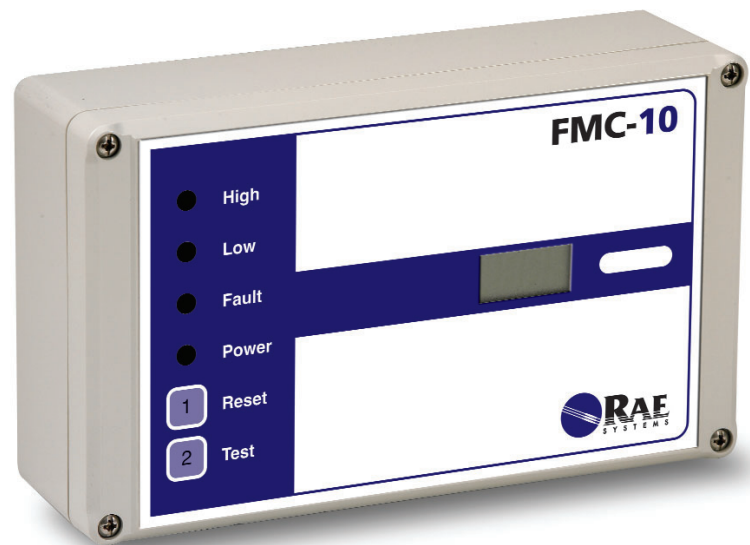

Specifications*

Measuring Range	Combustible Gas - LEL, % Vol, ppm Toxic Gas - ppm, % Vol Oxygen - % vol - Depletion or Enrichment Any 4~20mA input signal
Indicators	Digital Display 3 1/2 Digit Power - Green L.E.D. Switch on delay power indicator flashing - 45 secs Alarms Lo/Hi - Red L.E.D.s Fault - Amber L.E.D. System Test - Alarm L.E.D.s flashing Alarm relay inhibit - Fault L.E.D. on
Audible Alarm	Low, High and Fault Alarms
Power Supply	230/115v AC 50/60 Hz or 24vDC The two voltages may be utilised simultaneously - stand
Power Consumption	4 watts - full alarm
Outputs	Low, High and fault alarm relays -SPCO normally de-energised - energised option Lo gas alarm relay SPCO normally energised - de-energised option latched or unlatched Fault relay SPCO normally de-energised - energised option All contacts rated 5A - 230v AC 4-20mA/1-5v Output 24vDC @ 100mA max - auxiliary equipment (non inductive)
Alarm Settings	Digital setting (fully adjustable between zero and full scale) Delay to alarm options - 10/30 seconds, 10 minutes
Sensor Inputs	Bridge type 3 wire detector mv (Catalytic) 4-20mA (electrochemical / infrared)
Sensor Cable	3 core 1.5mm2 screened 1.5km
Miscellaneous	Operating temperature -10 to +50°C Storage temperature -10 to 65°C Alarm relay inhibit during calibration Sounder Inhibit System function test switch Dimensions L 200mm H 120mm D 58mm Weight 0.8 kg Protection IP65 Field Terminals - screw type 2.5mm Cable entry - top, bottom, sides, rear

*Specifications are subject to change


Sensors

Hazardous Area



The FMC-10 includes

- FMC-10
- Instruction manual

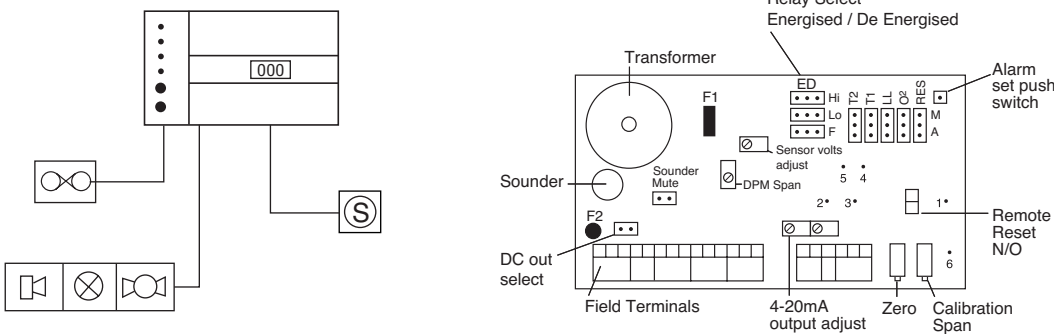

Field terminals

1	2	3	4	5	6	7	8	9	10	11	12	13	14
E	L	N	+	-	Nc	C	No	Nc	C	No	Nc	C	No
Mains in			IN/OUT DC		Low Alarm		High Alarm		Fault				

15	16	17	18	19	20
-	+	E	P	Y	W
4-20mA		Sensor			



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.