

new



KANE 250

combustion meter

The **KANE 250** is the lowest priced combustion analyser that does not compromise on performance or features.

Its unique rotary switch also makes it the simplest and quickest to use.

- O₂, CO, CO₂, CO/CO₂ ratio and efficiency readings
- Multi fuel
- Professional quality sensors (CO readings to 1ppm)
- Detachable flue probe
- Real time clock
- Infra-red output to optional printer
- Rubber sleeve with integral magnet
- Designed to meet BS7927



Each KANE 250 is supplied with:

Flue probe, batteries, rubber sleeve with integral magnet, and instruction manual.

KANE 250 options include:


Soft carry case, infra-red printer, NiMH rechargeable batteries and charger.

Parameter	Resolution	Accuracy	Range
Temp Measurement			
Flue Temperature	1°C/F	± 2°C (5°F) ± 0.3% reading	0–600°C 32–1112°F
Inlet Temperature (Internal Sensor)	1°C/F	± 1°C/F ± 0.3% reading	0–100°C 32–212°F
Temp (Nett) *2	1°C/F	± 2°C (5°F) ± 0.3% reading	0–600°C 32–1112°F
Gas Measurement			
Oxygen	0.1%	± 0.2% *1	0–21%
Carbon Monoxide	1ppm	± 10ppm <100ppm *1 ± 5% of reading	0–1,000ppm 4000 ppm max for 15 minutes
Carbon Dioxide *2	0.1%	± 0.3% reading	0–30%
Efficiency *2	0.1%	± 1.0% reading	0–99.9%
Excess Air *2	0.1%	± 0.2%	0–250%
CO/CO ² ratio *2	0.0001	± 5% reading	0–0.9999

Pre-programmed Fuels	Natural gas, Light Oil (28/35 sec), Propane, Butane, LPG.
Dimensions	
Weight	1kg (2.2lb)
Handset	200mm (7.9") x 45mm (1.8") x 90mm (3.5")
Probe	L 300mm (11.8") x Dia 6mm (0.25") with 240mm (9.4") long stainless steel shaft, type K thermocouple and 3m (6') long neoprene hose
Ambient Temperature	0 to +40°C (+32°F to +104°F) 10% to 90% RH non- condensing
Battery Life	4 AA cells Typically 12 hours using Alkaline AA cells
Charger (optional)	Input: 110Vac/220 Vac nominal NiMH batteries recommended

*1: Using dry gases at STP

*2: Calculated

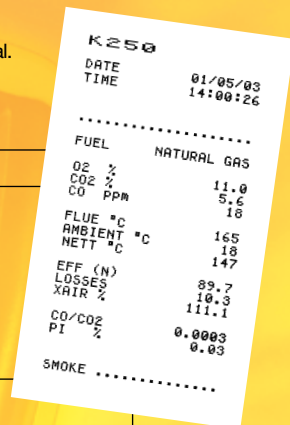

specifications



it's easy with Kane

Keison Products
P.O. BOX 2124,
Chelmsford,
CM1 3UP

Tel: +44 (0) 1245 600560
Fax: +44 (0) 1245 600030
Email: info@keison.co.uk
www.keison.co.uk





Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.