

MINI - VERTICUS III

The supersilent complete station

› 150–250 l/min

› 225 / 330 bar

› SILENT HOUSING


› COMPACT AND POWERFUL



**The new MINI-VERTICUS III:
A newly designed field-proven system concept that sets standards in technology and ergonomics.**

The ideal partner for diving centers and diving shops, who expect reliable and long-life use coupled with low operating expenses. Rapid spare parts supply and service guarantee a successful diving season - worldwide. The patented P41® purification system guarantees purest breathing air quality acc. to DIN EN 12021.



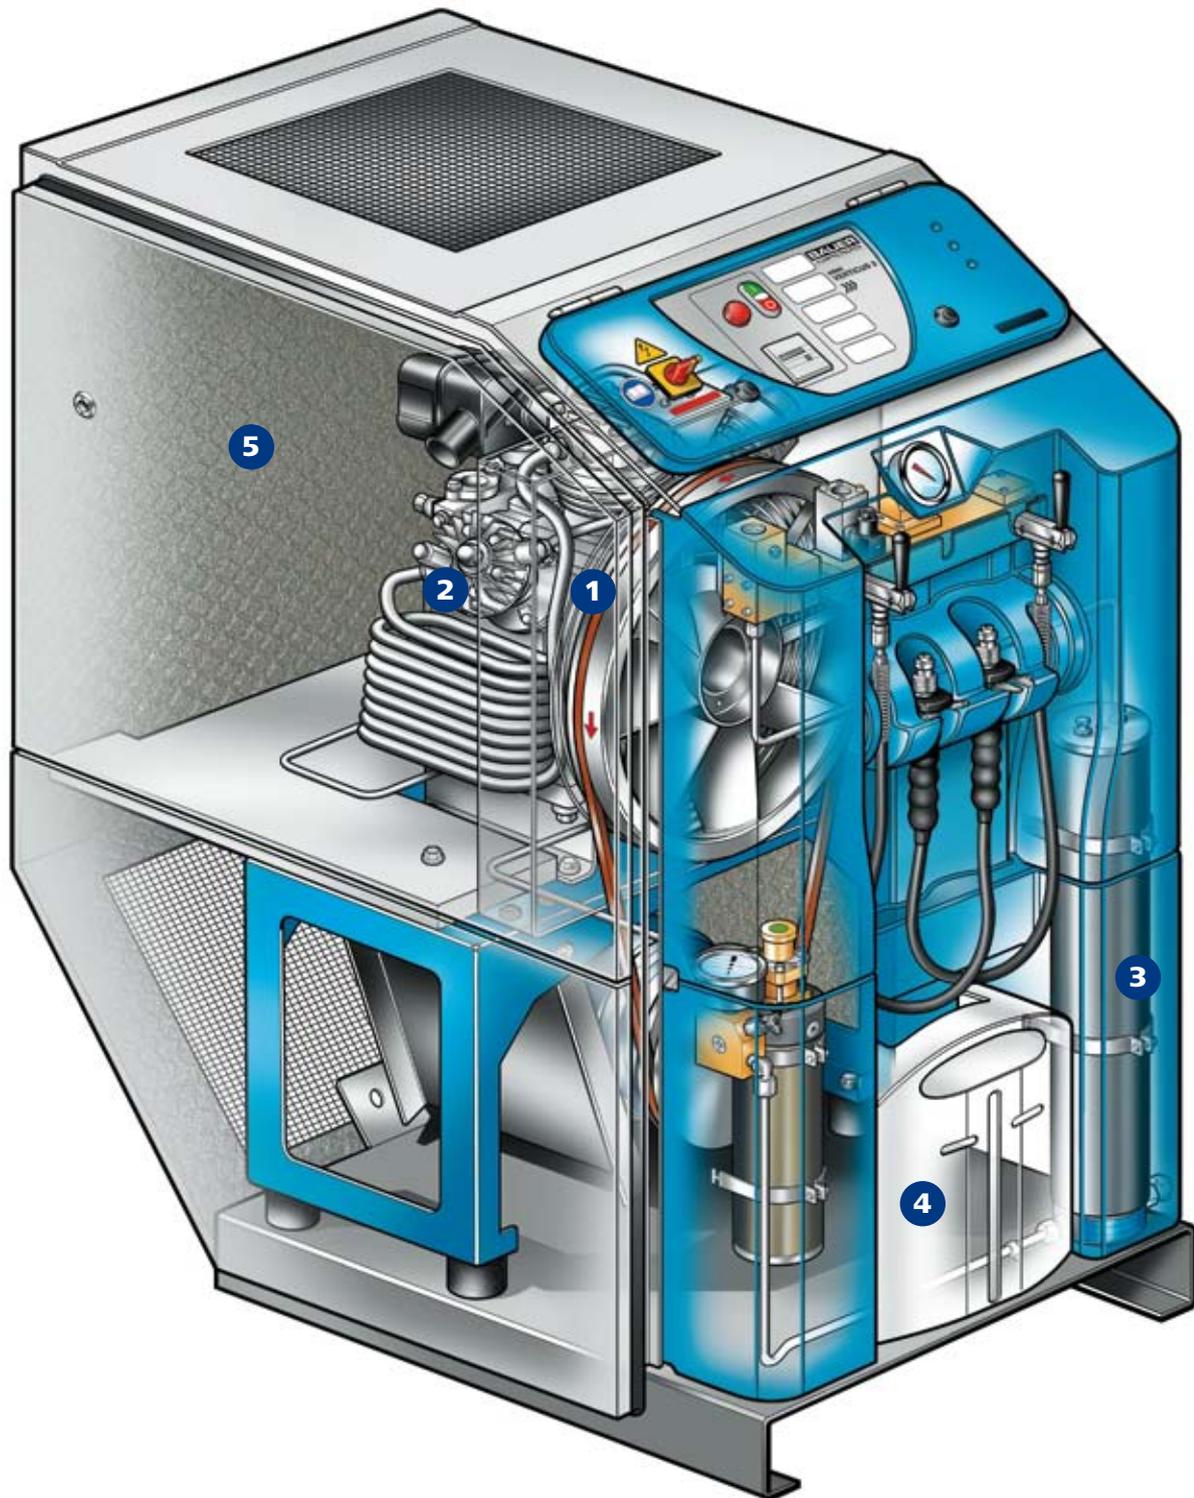

1 FANWHEEL

2 COMPRESSOR BLOCK

3 P41-FILTER SYSTEM

4 CONDENSATE COLLECTING TANK

5 SUPER SILENT HOUSING

CONVINCING SCOPE OF SUPPLY

1 COOL HEAD

Trouble-free continuous running even in the most difficult climatic conditions thanks to its optimum cooling system.

- › The cooling air is conducted through the housing to achieve effective heat elimination.
- › Fanwheel with optimized blade geometry generates more pressure for improved cooling power.
- › Oil cooling in the final compression stage for minimal wear and tear and for a longer life.

2 STRONG HEART

Highest economic efficiency due to the gearing of the compressor blocks which is made for extreme working stress and continuous running.

- › Long-life, robust industrial roller bearings with minimum friction.
- › Hardened cylinders with special honing technique for minimal oil consumption and wear.
- › Robust low pressure oil pump with oil filter for longer life and oil change intervals.
- › New powerful intake filter for greater delivery capacity and silent operation.
- › Interstage and afterstage coolers made of stainless steel against corrosion.
- › Virtually wear and tear-free high-tech polymer piston rings in the last stage.



SECURUS - perfectly integrated design

3 LOTS OF STAYING POWER

P41-Filter system with extended filter life offers increased economical advantages.

- › Superior BAUER filter technology guarantees ultrapure breathing air conforming to DIN EN 12021.
- › The patented SECURUS filter monitoring system (optional) continually checks the humidity in the air and automatically switches off when the filter is saturated - now integrated in the operating panel, making it even easier to control!



P41 filter system, cartridge change in a minute

4 OBLIGING

thanks to compact dimensions, ergonomic design and a maintenance-friendly system.

- › Condensate reservoir integrated in the front of the housing for fast disposal and easy control.
- › Free access to compressor block, air filter and oil inlet connection simplify maintenance work.


5 QUIET

Thanks to its efficiently insulated „silent housing“, it operates at 68 dB(A)*.

*+/- 2 dB(A), at the distance of 1m / 3'

- › Highly absorbent special insulation materials.
- › Housing designed to optimize sound reduction.

THE SYSTEM

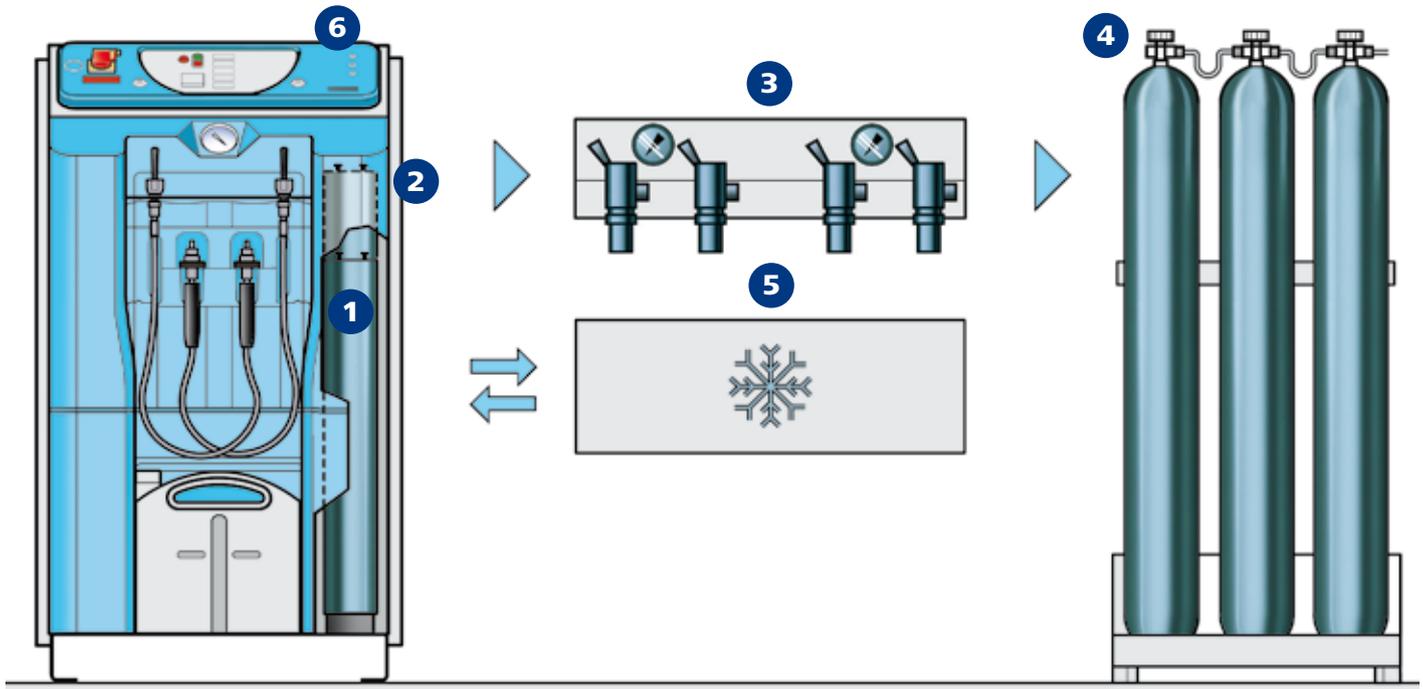

- 1 P61 FILTER SYSTEM** optional with of higher capacity for longer filter life
- 2 CHARGE CONNECTION** for external filling panel and storage bank
- 3 EXTERNAL FILLING PANEL** for high charge capacity requirement
- 4 STORAGE BATTERY** for a large volume of spare air
- 5 AIR-KOOL** refrigeration dryer for increased life span of the purification cartridge
- 6 SECURUS** filter monitoring guarantees ultra-pure air conforming to DIN EN 12021

TECHNICAL DATA

Model	FAD	RPM	Filling rate	Drive		Filter system	Dimensions (app. cm)			Weight net	Noise at 1m/3'
	l/min ²⁾	min ⁻¹	min ³⁾	kW	HP	P-range	L	W	H	(app. kg)	dB (A)
max. 330 bar ¹⁾											
MV 100-4-3	150	1340	1,3	4,0	5,5	P41	102	74	130	255	68
MV 120-4-3	200	1270	1,0	4,0	5,5	P41	102	74	130	255	68
MV 120-5,5-3	250	1470	0,8	5,5	8,0	P41	102	74	130	260	68

1) available with switch over device 330 / 225 bar or 225 bar/330 bar alternatively

2) Cylinder filling from 0 to 200 bar

3) Filling rate for 1 l cylinder capacity



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.