


IRtec Rayomatic 4

Mini Infrared Temperature Sensor



INFRARED THERMOMETERS

- ▶ Low Cost
- ▶ Miniaturized $\varnothing 18 \times 129$ mm
- ▶ Temperature Range up to 500°C
- ▶ Linear mV or TC J/K
Analog Output
- ▶ Powered by 12-24 Vdc @20 mA
- ▶ IP65 (NEMA 4)
- ▶ Easy Installation and Wiring

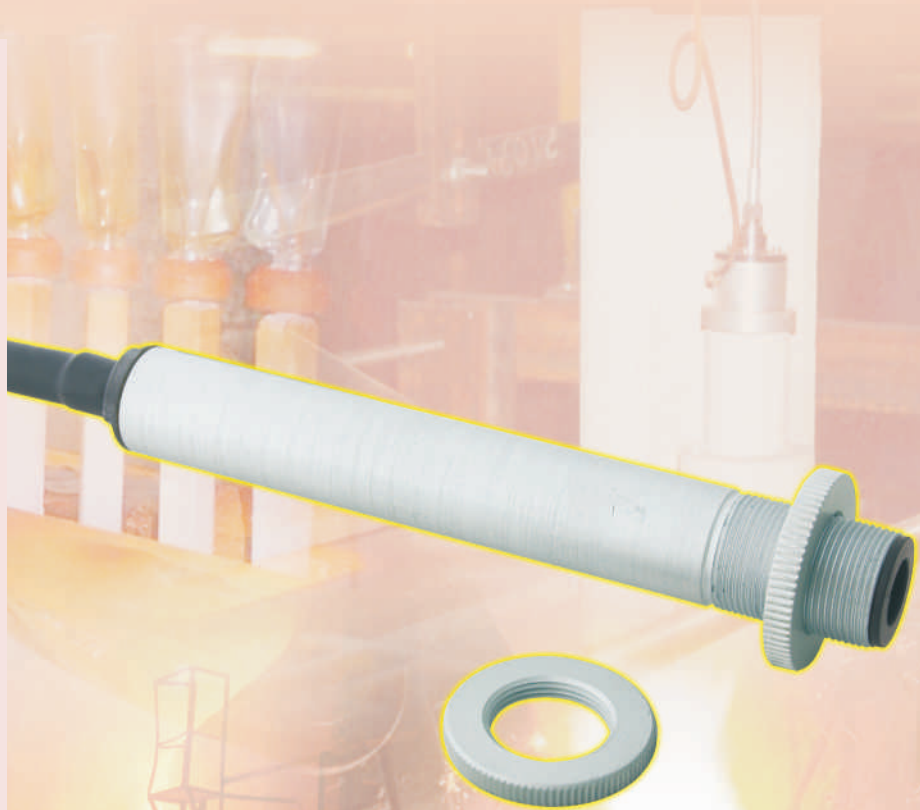

Introduction

IRtec Rayomatic 4 low cost infrared temperature sensor represents the ideal solution to replace traditional J-type or K-type thermocouples with the advantage of non-contact measurement. It is available with your choice of thermocouple or millivolt signal outputs. The output impedance as a thermocouple does not create any problem of connection to any device (indicator, controller and recorder) also with "open TC" test active. Rayomatic 4 microcontroller allows very accurate and linear measurements. The sensor is automatically temperature compensated using a built-in Pt100 sensor. The sensor with 0-5V (mV/°) output can be used for easy PLC or control system connection and allows long distance cable minimizing noise and error. Standard integration with 4-wire connection.

Applications

Infrared thermometers measure the object surface temperature without touching it. They calculate the surface temperature on the basis of the emitted infrared radiation from an object. The most important feature of infrared thermometers is that they enable the user to measure objects contact less. Consequently, these products help to measure the temperature of inaccessible or moving objects without difficulties.


Infrared **IRtec Rayomatic 4** temperature sensor can be used in multiple locations to detect hot spots on moving material. Product can be used on dryers, conveyor belts, webs, and in thermoforming operations to sense temperature variation.

The sensor is suited for plastics, rubber, wood, paper, textile, glass and ceramic, paint, varnish, asphalt, and food applications.

New Low Cost , High Performance Non-contact Infrared Temperature Sensor Ideal for OEMs

Report of Calibration

IRtec Rayomatic is delivered, on request, with a traceable to the International Standards, Report of Calibration stating the nominal and actual values and the deviation errors.

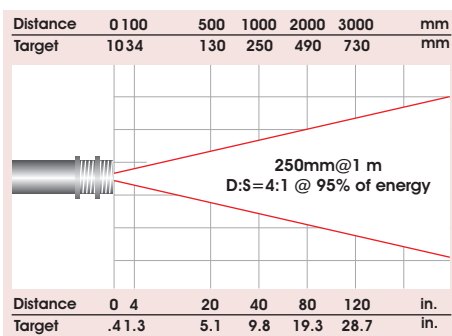

Specifications

Spectral band:

8-14 mm

Optical resolution:

4:1 (250mm@1000mm)

Response time:

350 ms (τ95)

Emissivity:

Pre-set to 0.95. Special on request at ordering

Working temperature:

-10 to +70°C / 10-95% RH non condensing
up to 90°C with air cooling

up to 200°C with water cooling

Environmental rating:

IP65 (NEMA-4) Aluminium housing
(stainless steel on request)

Temperature Stability:

Zero = 300ppm/°C - Span = 200ppm/°C

Accuracy:

±2% of rdg. or ±2°C

Relative accuracy data are stated with operative conditions +23°C ±5°C and emissivity = 1.0

Repeatability:

±1% of rdg. or ±1°C

Temperature resolution:

0.1°C/°F

Power supply:

12 ... 24 Vdc (<2.5% ripple @20mA)

Output impedance:

50Ω

Load impedance:

50kΩ


Storage temperature:

-30°C to +70°C / 10-95% RH non condensing

Dimensions and weight:

φ18 mm x 129 mm Thread M18x1 - 90 g nett

Body Scheme

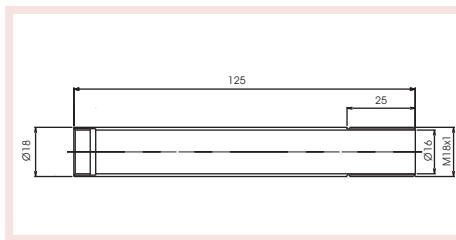

Accessories

EE290128	Air cooling jacket with air purge system
EE290108	Water cooling jacket
EE290106	90° adjustable mounting adapter
EE290110	2 axis adjustable mounting adapter
EE290114	3 axis adjustable mounting adapter
EE290115	Standard air purge device
EE290105	Radial air purge device (do not cool the target)

Ordering Code

Code	Model
1155-810	IRtec Rayomatic 4 , two mounting nuts, 1 mt of shielded cable and instruction manual.

Table A	Range
1	0 to 120°C
2	0 to 300°C
3	0 to 500°C
9	Special on request

Table B	Sensor Range - Available Signal Output
1	10 mV/°C or 0-5V (scaling 0-500°C)
2	J-type Thermocouple
3	K-type Thermocouple

Table C	Electrical Connection
1	1mt. long shielded cable (max. 105°C)
2	8mt. long shielded cable (max. 105°C)
3	8mt. long high temperature shielded cable (max. 200°C)
9	Special on request

Table D	Report of Calibration
0	none
1	NIST / EA traceable with data

1155-810 - 1 - 2 - 1 - 0 Typical ordering code



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.