# MDM25 Hand-Held Hygrometer



The MDM25 is a portable, battery-operated hand-held hygrometer, and is available with a number of different probe configurations. It displays relative humidity, temperature and one calculated value, making this hygrometer suitable for a wide range of applications. The user can choose to display either °C or °F.

#### Highlights

- Displays %RH and temperature, plus dew-point, absolute humidity and wet bulb temperature
- · Simple to operate
- Long term stability: ±1% RH over 12 months

## **Technical Specifications: Hand-Held Hygrometer**


Performance		
Measurement units	%RH, °C/°F Ta, °C/°F Td, g/m³, °C/°F Tw	
Mechanical Specifications		
Ingress protection	IP54 (hygrometer only)	
Hygrometer housing material	Molded polymer housing ABS and rubber surround	
Weight	300g (10.58oz)	
Display resolution	Graphic LCD 128 x 64 pixels	
Electrical Specifications		
Supply voltage	4.5 V (3 x AA batteries — providing approximately 70 hours of operation)	
Electrical connections	M9 5-way triad connector	


#### **Probes**

Performance		
Measurement range (RH)	0–100% RH	
Accuracy @ 25°C (77°F) temperature	$< \pm 0.2$ °C ( $\pm 0.36$ °F)	
Stability — RH sensor	±1% RH/year	
Response time — RH sensor	<10 sec typical (for 90% of the step change)	
Measurement & operating range (T) Fixed and standard probe Sword probe Remote probe  Accuracy @ 25°C (77°F) Humidity — Fixed probe	-20 to +80°C (-4 to +176°F) -20 to +100°C (-4 to +212°F) -20 to +150°C (-4 to +302°F) ±2% RH (10–90% RH)	
<ul> <li>Remote probe</li> </ul>	±2% RH (5–95% RH)	
Mechanical Specifications		
Weight: Fixed probe Standard probe Sword probe Round 300mm probe Round 500mm probe	FPR 30g (1.06 oz) SPR 90g (3.17 oz) SWPR 500g (1.1 lb) HTPR300 380g (13.4 oz) HTPR500 620g (1.37 lb)	

### **MDM25**

#### **Dimensions**

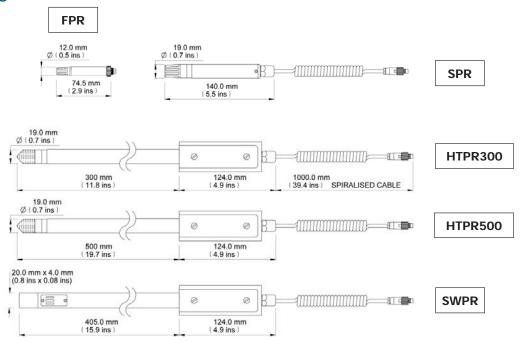

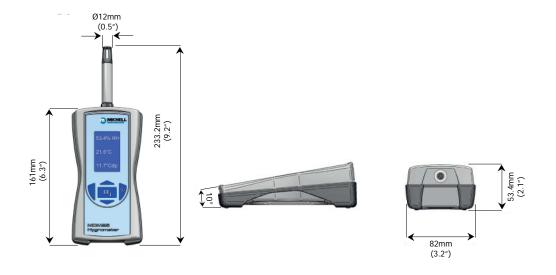





Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.

**:::** UK Office Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399 Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.