

ALTAIR[®] 4XR

Multigas Detector



Real-time. Rugged. Reliable.

*Because every life has a **purpose...***

SAFETY AT THE *SPEED OF NOW*




BE SAFER

With rapid-response sensors.

- LEL
- CO
- O₂
- SO₂
- H₂S
- NO₂

POWERED BY
XCell
SENSORS

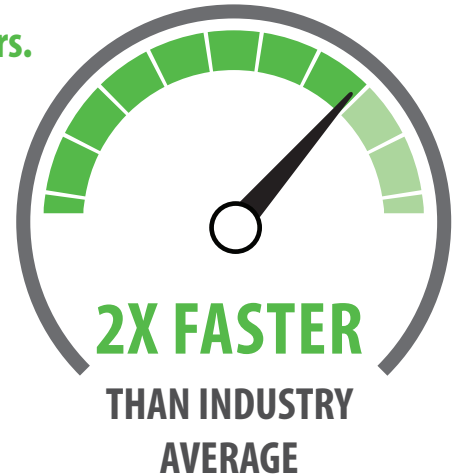

WORK SMARTER

With the ALTAIR Connect app.

- Update detector settings
- Email calibration details
- Create notification groups
- Get compliance reminders




ALTAIR® Connect






STAY CONNECTED

With alerts from the field.


- Live gas readings
- InstantAlert™ distress calls
- MotionAlert™ man-down alarms
- Non-compliance warnings

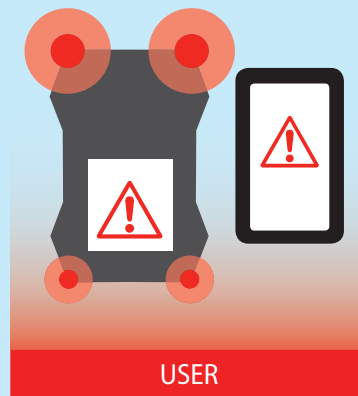

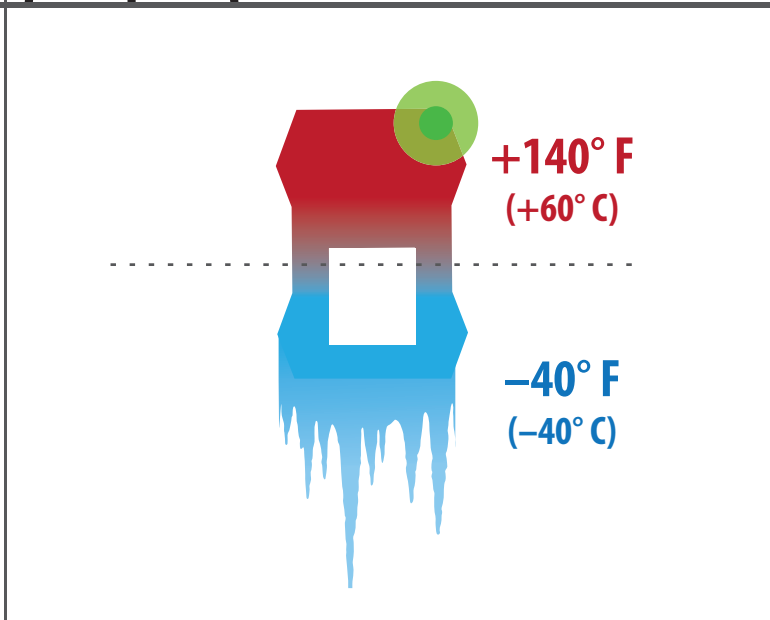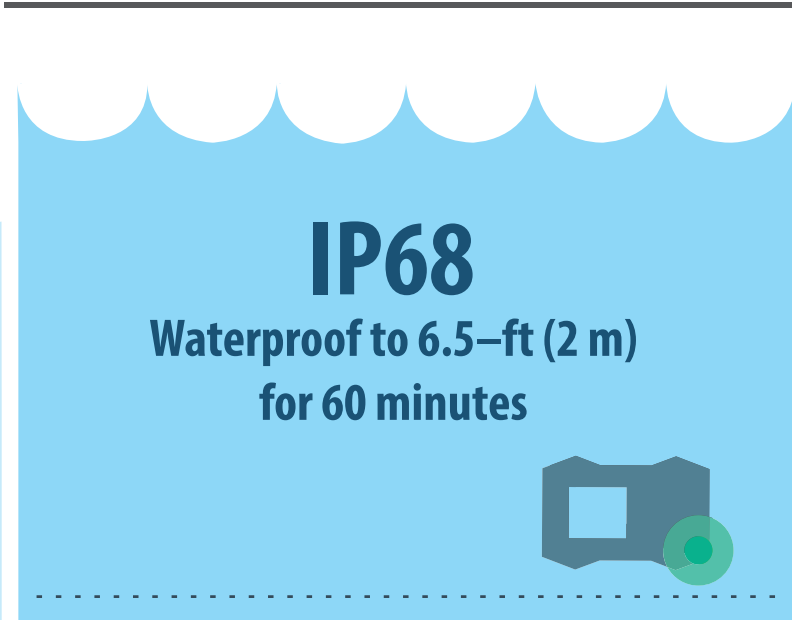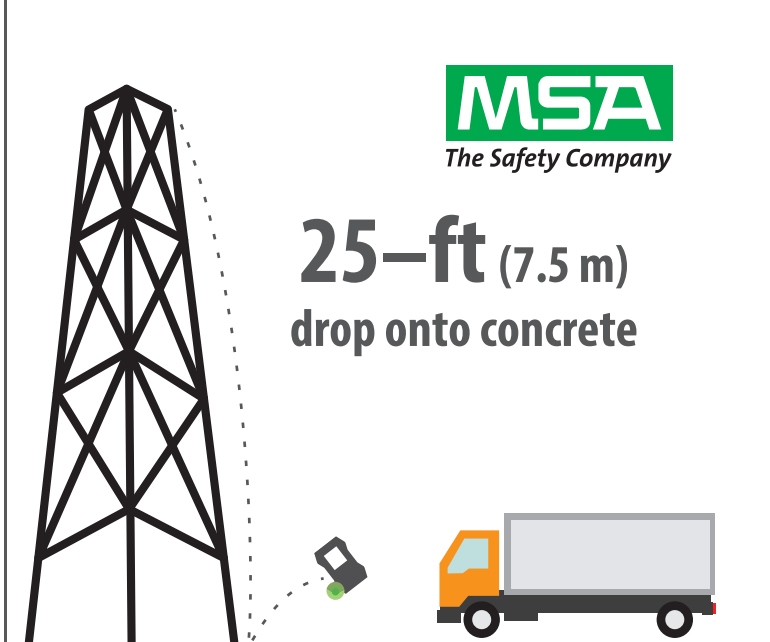


BUILT TO WORK WHEREVER YOU WORK

FAST, EFFICIENT MAINTENANCE

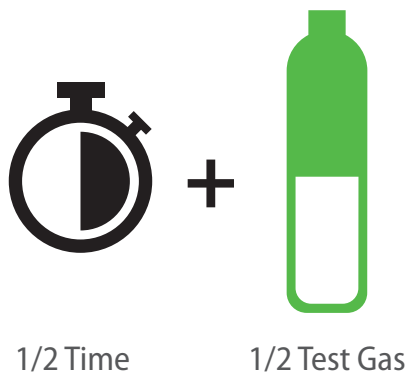

COMPLIANCE AT A GLANCE

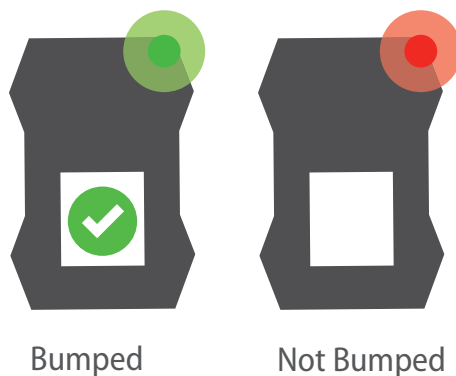

GUARANTEED PERFORMANCE



Specifications & Order Information

Specification	Description		
GAS TYPES	Gas	Range	Resolution
	LEL	0–100 %	1 %
	O ₂	0–30 %	0.1 %
	CO	0–1999 ppm	1 ppm
	H ₂ S	0–200 ppm	1 ppm
	H ₂ S-LC	0–100 ppm	0.1 ppm
	SO ₂	0–20 ppm	0.1 ppm
	NO ₂	0–50 ppm	0.1 ppm
WARRANTY	4 years (+ optional 1-year extension)		
DURABILITY	25-foot (7.5 m) drop protection MIL-STD-810G drop protection Certified IP68 rating		
TEMPERATURE RANGE	–40 °F to +140 °F –40 °C to +60 °C		
RELATIVE HUMIDITY	5 % – 95 % intermittent 15 % – 90 % non-condensing		
POWER	Rechargeable Li-polymer battery 24-hour run-time < 4 hour charge time		
PHYSICAL	4.4" x 3.0" x 1.4" 11 cm x 7.6 cm x 3.5 cm 8 oz (228 g)		
DATALOGGING	> 50 hours (adjustable) > 500 event logs		

ALTAIR 4XR Gas Detector Part Numbers			
Configuration	Case Color	North America	ATEX
LEL, O ₂ , CO, H ₂ S	Charcoal	10178557	10178573
LEL, O ₂ , CO, H ₂ S	Phosphorescent	10178558	10178569

MSA GALAXY GX2 Automated 4XR Test Stands for 1 Gas Cylinder				
Integrated 4XR Charger	North America	Europe	UK	Australia
Yes	10128630	10128639	10128659	10128669
No	10128642	10128651	10128661	10128671

Calibration Gas	
1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S	
34-liter cylinder	10128160
58-liter gas cylinder	10053022
ALTAIR Pump Probe with charger	
For USA/Canada	10152669
For ATEX/IEC	10052668

XCell Sensor Replacement Kits	
EX Combustible	10106722
O ₂	10106729
CO/H ₂ S	10106725
CO/H ₂ S-LC	10121213
CO-H ₂ /H ₂ S	10121214
SO ₂ /H ₂ S-LC	10121215
CO/NO ₂	10121217

Additional ALTAIR 4XR versions, calibration gas cylinders, sensors and accessories are available.

Certifications		
North America USA Class I, Division 1, Groups A, B, C & D Class II, Division 1, Groups E, F & G Class III, Division 1 Ambient temperature: –40°C to +60°C; T4 Canada CSA CAN/CSA C22.2 No. 152 Combustible Gas Detection Instruments C22.2 No. 152 Performance Ambient Temperature: –20°C to +54°C; T4 C22.2 No. 157 Intrinsic Safety Ambient Temperature: –40°C to +54°C; T4	Europe Directive 2014/34/EU (ATEX): II 1G Ex ia da IIC T4 Ga, –40°C to +60°C, IP68 CE 0080 Directive 2014/30/EU (EMC): EN50270 Type 2, EN61000-6-3	IEC IECEx Ex ia da IIC T4 Ga, –40°C to +60°C, IP68



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.