



Model SD Series

Shipping Scale



The Ohaus SD Series Shipping Scale – Portability, Durability, Ohaus Quality and Value

The SD Series is a well-built portable bench scale designed specifically with affordability, utility and everyday usage in mind. Ideal for home office, mail room, shipping and receiving, and general commercial and industrial weighing applications, the SD Series features a durable painted steel treaded platform, a remote indicator with two tactile function keys, battery operation and flexible mounting capability for a truly portable scale that can be carried and operated in various locations. The SD Series is your efficient solution to a variety of weighing needs, when you need it, where you need it.

Standard Features Include:


- 3 popular capacity models: 35kg, 75kg, 200kg
- Maximum displayed resolutions from 1:1650 to 1:2200
- ABS plastic indicator housing with reinforced ribs
- Universal table/wall mounting brackets included
- Flexible coiled cable, extendable
- Painted steel platform with raised embossed treads
- LCD with fast weight display in kg or lb
- Simple 2 function raised tactile keys
- AC adapter or 360 hour battery operation with Auto-shut off feature
- Calibration in kg or lb
- Carry-handle on carton for ease of portability
- Industry leading support

The Ohaus SD Shipping Scale

Specifications

Model	SD35	SD75	SD200
Capacity x Readability	35kg x 0.02kg	75kg x 0.05kg	200kg x 0.1kg
Maximum Displayed Resolution	1:1750	1:1650	1:2200
Calibration Weights (fixed)	25kg	50kg	100kg
Construction	ABS plastic housing and mounting brackets Painted steel base with raised, embossed tread pan		
Weighing Units	kg, lb		
Application Modes	Weigh only		
Linearity	± 1d		
Repeatability (std. dev.)	1d		
Display	1-window, LCD, 20mm High, 4-digit, 7-segment		
Keyboard	2 function raised tactile mechanical switches: [ON/OFF Zero] / [UNITS Cal]		
Zero Range	to capacity by subtraction		
Stabilization Time	3 seconds		
Cable Length	Extendable 1.8m to 2.7m (full extension)		
Operating Temperature	5° to 40°C / 41° to 104°F 10%-80% relative humidity, non-condensing		
Power	AC Adapter 9V DC / 100mA 3 "C" alkaline batteries (<i>not included</i>)		
Battery Operating Time	360 hours		
Auto-Shut off	4 minutes with no activity (battery operation only)		
Safe Overload Capacity	150% of capacity		
Indicator Size	210L x 91W x 39H mm		
Base Size	316L x 280W x 45H mm		
Shipping Dimensions	380L x 100W x 465H mm		
Net Weight	2.6kg	3.3kg	
Shipping Weight	3.7kg	4.3kg	
Other Features	Calibrate in kg or lb, Calibration lock via internal switch		

Outline Dimensional Drawings

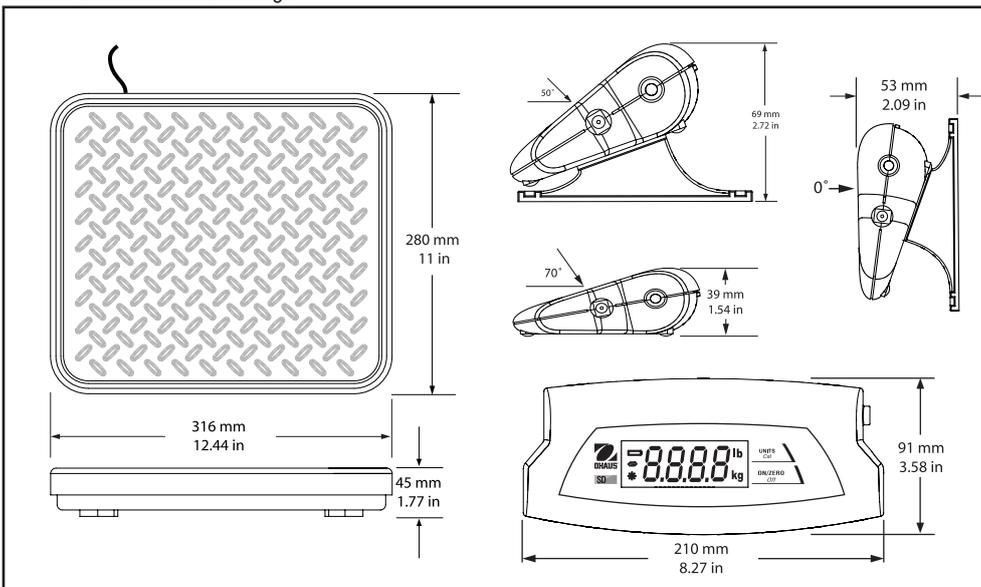

80774231 © Copyright Ohaus Corporation





Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.