

Rapid Deployment Kit (RDK)





Turn-Key System for Hazardous Environment Detection

The Rapid Deployment Kit (RDK) is designed for quick assessment of chemical and radiological threats. The kit includes four AreaRAE monitors and a turn-key Host Controller running ProRAE Guardian software for local monitoring up to two miles (3km) away, or via the Internet at any location. Housed in a military-grade self-contained case, the Rapid Deployment Kit is easy to transport and easy to deploy. The system can easily scale up to 64 detectors and includes an option for GPS.


- Shave valuable minutes off response times
- Remotely monitor hazards from safe location
- Protect wide area and community
- Achieve instant real-time situational awareness

KEY FEATURES

- Turn-key package with one-button operation
- Up to five sensors per monitor
- Rapidly deployable system up in minutes
- Optional GPS for tracking of monitors
- Easy to transport

APPLICATIONS

- HazMat & Emergency Response
- Public venue protection
- Marine and offshore wells
- Confined space entry
- Fence-line monitoring
- Environmental remediation

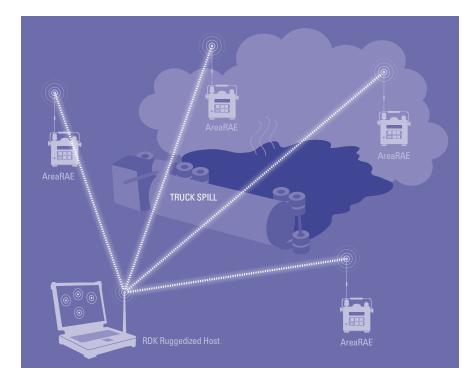

Rapid Deployment Kit (RDK) used to establish a perimeter around hazardous zone





Rapid Deployment Kit



Turn-Key System for Hazardous Environment Detection

Specifications

Size	RDK Ruggedized Host: 12" L x 3" W x 12" D (304mm L x 76mm W x 304mm D) RDK Host: 20" L x 8" W x 16" D (508mm L x 203mm W x 406mm D) RDK Detector Kit: 34" L x 14" L x 21" D (864mm L x 356mm L x 533mm D)	
Weight	RDK Ruggedized Host: 14 lbs (6.35 kg) RDK Host: 23 lbs (10.43 kg) RDK Detector Kit w/AreaRAE plastic-housing monitors: 78 lbs (35kg) RDK Detector Kit w/AreaRAE steel-housing monitors: 105 lbs (48kg)	
Sensors	Up to five sensors per monitor (PID, combustible, and any combination of Ω_2 , toxic, or gamma)	
AreaRAE Operating Hours	Up to 18 hours continuous operation	
Safety Certification	Refer to AreaRAE datasheet	
Frequency	Refer to AreaRAE datasheet	
RF Range	Up to 2 miles (3km)	
Optional	Integrated GPS receiver and mapping	

Sensors

Gas	Range	Resolution
Oxygen	0 to 30.0%	0.1%
Combustible	1 to 100% LEL	1% LEL
VOCs	0 to 199 ppm, 200 to 2,000 ppm	0.1 ppm, 1 ppm
Carbon Monoxide/Hydrogen	10 to 2000 ppm	10ppm
Hydrogen Sulfide	0 to 100 ppm	1 ppm
Sulfur Dioxide	0 to 20.0 ppm	0.1 ppm
Nitric Oxide	0 to 250 ppm	1 ppm
Nitrogen Dioxide	0 to 20.0 ppm	0.1 ppm
Chlorine	0 to 10.0 ppm	0.1 ppm
Hydrogen Cyanide	0 to 100 ppm	1 ppm
Ammonia	0 to 50 ppm	1 ppm
Phosphine	0 to 5.0 ppm	0.1 ppm
Hydrogen Chloride	0.5 to 10 ppm	1 ppm
Hydrogen Fluoride	0.5 to 10 ppm	1 ppm

^{*}Specifications are subject to

RDK System Package

RDK Detector Kit Includes:

- 4 AreaRAEs (plastic or steel housing)
- RAELink2 repeater
- 4 spare Li-lon batteries
- 4 alkaline battery-pack adapters
- Calibration kit
- * All 4 detectors and repeater can be charged inside case



RDK Detector Kit

RDK Host Controller Kit Options

- Ruggedized military-spec laptop w/embedded RAELink modem
- Touchscreen IP54 water-resistant rating
- Shock-resistant and electromagnetically shielded
- Preloaded with ProRAE Guardian software and 5-year license



RDK Ruggedized Host

or

- Laptop and RAELink modem housed in rugged case
- Preloaded with ProRAE Guardian software and 5-year license



RDK Host



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.

::: UK Office Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399 Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.