

PROFLOW 2 EX

POWERED AIR RESPIRATOR



INTRINSICALLY SAFE

Scott Safety's Proflo 2 EX is for applications where potentially explosive atmospheres require an intrinsically safe PAPR.

Proflo 2 Ex is equipped with microprocessor-controlled airflow management for faultless operation and accurate airflow regulation. The on-board control system continually monitors the status of the power pack and adjusts the airflow rate. The casing is highly durable and resistant to impact, high temperature, chemical splash and welding sparks.


PRODUCT HIGHLIGHTS

- Shower-proof construction and downward filter orientation for easy decontamination
- Extensive range of headtops, facepieces and filters which offer protection across a wide range of applications
- Ex-Classification: II 2G Ex ib IIC T3 / II 3D Ex tD A22 IP54 T80C



PROFLOW 2 EX

INTRINSICALLY SAFE POWERED AIR RESPIRATOR

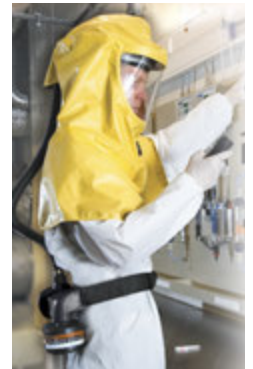

● INTELLIGENT POWER PACK

- Proflow 2 Ex is equipped with microprocessor-controlled airflow management for faultless operation and accurate, quick airstream regulation.
- Built-in control system continually monitors the status of the power pack and adjusts the airflow rate.
- Clear display shows both battery capacity and blower power.
- Audible warnings when battery is low or when minimum flow rate is not achieved.

● HEAVY-DUTY CONSTRUCTION

- The casing is fully resistant to all forms of wear and tear including impact, high temperature and chemical contact.
- Durable - long service life.
- The battery is encased for protection against accidental damage.

● COMFORTABLE TO WEAR

- Compact construction offers unrivalled ergonomic wearability.
- Extremely lightweight, portable system.

● ADVANCED MAINTENANCE

- To facilitate load tracking and servicing, the Proflow 2 Ex incorporates a data-logging function, which automatically records data about the usage and performance of the blower unit.
- Key components of the blower casing are easy to replace and to maintain, which helps to extend service life and provide low through- life costs.

Proflow 2 EX

Technical Data

Approvals:	As respiratory protective equipment: EC Type-examined by BGIA, Germany, ID: 0121. As Ex equipment: EC Type-examined by VTT Industrial Systems, Finland. VTT, ID: 0537.
Air flow:	Min 120 l/min
Battery:	NiMH 9.6 V Ex. Rechargeable. Contains a safety circuit. Internal over current and temperature protection.
Battery operating time	Typically 8 hours between re-charges depending on the filter/headtop combination.
Recharger:	Recharging time 6 h. Automatic trickle charge. Recommended recharging temperature < 20 °C.
Temperature conditions:	-10°C to +40°C
Blower unit status indication:	Visual display of battery status (A), filter blockage (P). Warning buzzer of low battery, operating time left 15 min.
Weight:	1.5 kg without filters
Sound level:	< 70 dB
EX classification:	II 2G Ex ib IIC T3 / II 3D Ex tD A22 IP54 T80C The blower/battery system has been certified as Intrinsically Safe Equipment to EN 50020 and 50014 by VTT certification services. VTT No. Ex - 00.E.005X.

Ordering Information

Article Number	Description
5063781	Proflow 2 EX 120 (including blower, battery, charger, hose and belt)

For information regarding compatible headtops for use with Proflow 2 EX, please contact Scott Safety





Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.