



The Sensepoint range of flammable, toxic and oxygen gas detectors offer users a low cost solution to their gas monitoring needs.



One-Stop Shop

- Flammable, toxic and oxygen versions available
- Suitable for indoor or outdoor use
- IP65 as standard

Proven Sensor Technology

- Surecell™ electrochemical sensors
- Poison resistant catalytic bead
- Fast and reliable
- Typical 2 to 5 years operational life

ATEX Certified

- Complies with the latest European standards
- Hazardous area approval AND performance
- Can be used for uncertified applications

Easy to Use

- Factory set operation
- Simple to replace
- Minimal training required

Friendly Installation

- Universal junction box
- One box, three entries
- Metric and NPT compatibility
- Includes earth continuity plate for added RFI protection

Range of Accessories

- Weather Housing (IP66)
- Flow adaptor
- Duct mounting kit
- Collecting cone

The Sensepoint range of flammable, toxic and oxygen gas detectors offer users a low cost solution to their gas monitoring needs, in or out of doors and even in potentially explosive atmospheres. Supplied with a pre-wired junction box, a detector can be installed using conduit or armored cable and glands depending on individual site standards.

Sensepoint flammable and toxic gas detectors are designed for use in potentially explosive atmospheres and allow for hands free, unhindered access, to terminals via the hinged lid of the junction box. Installation should follow national guidelines using suitably approved armored cable and glands or conduit.

Supplied with earth continuity plate for improved immunity to RFI the junction box offers the installer a choice of 1/2", 3/4" and M20 connection via conduit or armored cable and Exe certified cable glands. Terminals are suitable for use with screened 0.5mm² (20AWG) to 2.5mm² (14AWG) cross sectional area cable, as needed to ensure minimum operating voltage at the detector, depending upon installed cable length.

Sensepoint flammable, toxic and oxygen gas detectors are designed for direct connection with the Honeywell Analytics' range of Touchpoint controllers.

Contact Honeywell Analytics for details.



Installation Details




Dimensions

Sensepoint flammable and toxic gas detectors allow for hands free, unhindered access, to terminals via the hinged lid of the junction box.

Supplied with earth continuity plate for improved immunity to RFI the junction box offers the installer a choice of 1/2"NPT, 3/4"NPT and M20 connection via conduit or steel wire armored cable and Exe certified cable glands.

Sensepoint flammable, toxic and oxygen gas detectors are designed for direct connection with the Honeywell Analytics' range of Touchpoint controllers. Contact Honeywell Analytics for details.


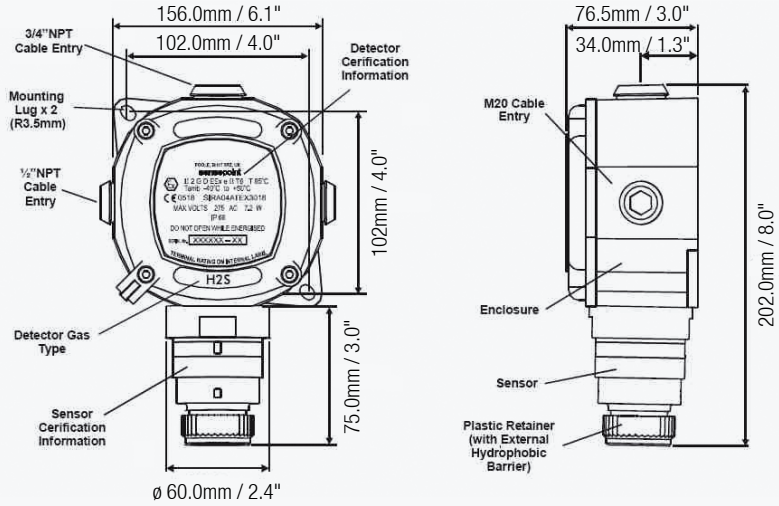


Flammable Version

Toxic & Oxygen Version


Terminal Arrangement

Terminal Arrangement

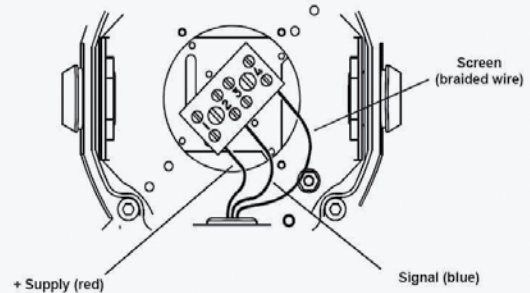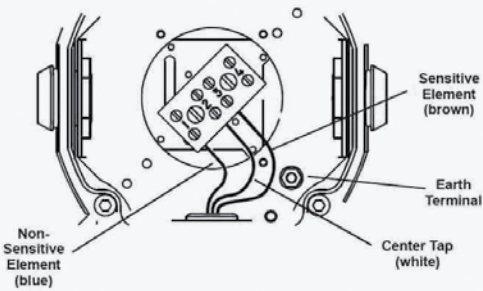


Electrical Connections

Electrical Connections

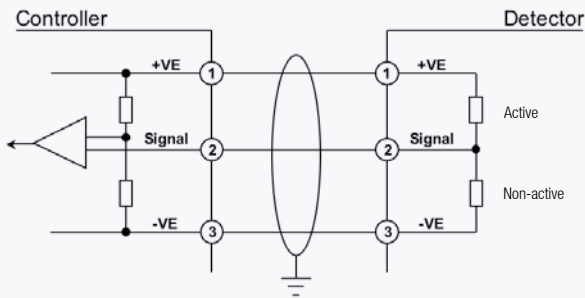

3 Wire mV Bridge Circuit

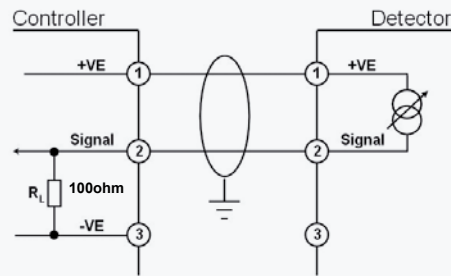

2 Wire 4-20mA (Sink)

Technical Summary



General Specification

Use Low cost, fixed point gas detector for the protection of personnel and plant from flammable, toxic and oxygen gas hazards

Detectable Gases

Ident	Name	Measuring Range			Operating Temperature*	
		1#	2	3	Min	Max
F	Flammable	0-100% LEL			-40°C / -40°F	50°C / 122°F
O	Oxygen	0-25% VOL			-15°C / 5°F	40°C / 104°F
C	Carbon Monoxide ⁺	0-200ppm	0-500ppm		-20°C / -4°F	50°C / 122°F
H	Hydrogen Sulphide ⁺	0-50ppm	0-20ppm	0-100ppm	-25°C / -13°F	50°C / 122°F
G	Hydrogen	0-1000ppm			-5°C / 23°F	40°C / 104°F
L	Chlorine	0-5ppm	0-15ppm		-20°C / -4°F	50°C / 122°F
S	Sulphur Dioxide	0-15ppm	0-50ppm		-15°C / 5°F	40°C / 104°F
N	Nitrogen Dioxide	0-10ppm			-15°C / 5°F	40°C / 104°F
A	Ammonia	0-50ppm	0-1000ppm		-20°C / -4°F	40°C / 104°F

+ SureCell™ Sensing Technology

*Standard range

*Check certified temperature

Construction

Electrical	Flammable (0-100%LEL) 3 wire mV bridge 2.9-3.5V, 0.7W 200mA constant current	Toxic & Oxygen 2 wire loop powered 4-20mA (plus screen) 16-30Vdc, 0.9W	Junction Box Earth continuity plate BK4 terminal block (4 way) 4 x 0.5mm ² (20AWG) to 2.5mm ² (14AWG) 1 x M20, 1 x 3/4" NPT, 1x1/2" NPT
Material	Polyphenylene Sulphide (PPS)	Polyphenylene Sulphide (PPS)	Fire retardant GFP
Weight	190g	185g (205g oxygen)	600g
Certification	Ex II 2 G D EExd IIC T6 T85 Deg C T _{amb} = -55°C to +55°C BAS98ATEX2156X SIRA03ATEX1116X (Performance)	Ex II 2 G D EExd ia IIC T4 T135 Deg C T _{amb} = -55°C to +65°C BAS98ATEX2157X	Ex II 2 G D EExe II T6 T85 Deg C T _{amb} = -40°C to +50°C SIRA04ATEX3018

Applicable Standards This product complies with the relevant CE standards including:
EMC to EN50270, Flammable to EN50054, Toxic to EN445544 (H₂S only)

Environmental

IP Rating	IP65 standard, IP66 with weather protection in accordance with EN60529:1992
Operating Temperature	Dependent upon gas type and certification
Operating Humidity Range	Continuous: 20-90%RH (non condensing), Intermittent: 10-99%RH (non condensing)
Operating Pressure	90-110kPa
Storage Conditions	Instrument -40°C to +50°C (-40°F to +122°F)

*Oxygen detection products must only be used to detect oxygen depletion in air



Ordering Information



Ordering Information

e.g. SPSTAX **H** **1** = SPSTXX**H1**

GAS TYPE	RANGE
F Flammable	1 } Refer to 2 } Detectable Gases 3 } Table Above
O Oxygen	
C Carbon Monoxide	
H Hydrogen Sulphide	
G Hydrogen	
L Chlorine	
S Sulphur Dioxide	
N Nitrogen Dioxide	

Standard Supply

Each detector is supplied complete with junction box, multiple cable entries, earth continuity plate, hinged lid and instruction leaflet, all sealed in a plastic bag inside a shipping carton

Shipping Details

Shipping carton dimensions: L160mm (6.3") x W215mm (8.5") x 80mm (3.1")
Approximate weight: 800g

Optional Accessories

02000-A-1645	Calibration gas flow housing (for flammable & toxic)
00780-A-0160	Right angle mounting bracket for ceiling mounting
02000-A-1640	Weather Housing for use with flammable detector including remote gassing nozzle
02000-A-1635	Weather Housing for use with toxic/oxygen detector including remote gassing nozzle
02000-A-1642	Collecting cone for use with flammable detector

Calibration Equipment

Contact Honeywell Analytics Representative



Our Product Range



Fixed Gas Monitoring

Honeywell Analytics offers a wide range of fixed gas detection solutions for a diverse array of industries and applications including: Commercial properties, industrial applications, semiconductor manufacturers, energy plants and petrochemical sites.

- » Detection of flammable, oxygen and toxic gases (including exotics)
- » Innovative use of 4 core sensing technologies – paper tape, electrochemical cell, catalytic bead and infrared
- » Capability to detect down to Parts Per Billion (ppb) or Percent by Volume (%v/v)
- » Cost effective regulatory compliance solutions

Portable Gas Monitoring

When it comes to personal protection from gas hazards, Honeywell Analytics has a wide range of reliable solutions ideally suited for use in confined or enclosed spaces.

These include:

- » Detection of flammable, oxygen and toxic gases
- » Single gas personal monitors – worn by the individual
- » Multi-gas portable gas monitors – used for confined space entry and regulatory compliance
- » Multi-gas transportable monitors – used for temporary protection of area during site construction and maintenance activities

- »
- » questions and queries
- » Fully equipped workshops to ensure quick turnaround on repairs
- » Comprehensive service engineer network
- » Training on product use and maintenance
- » Mobile calibration service
- » Customised programmes of preventative/corrective maintenance
- » Extended warranties on products



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.